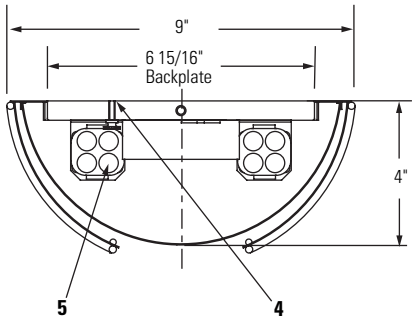

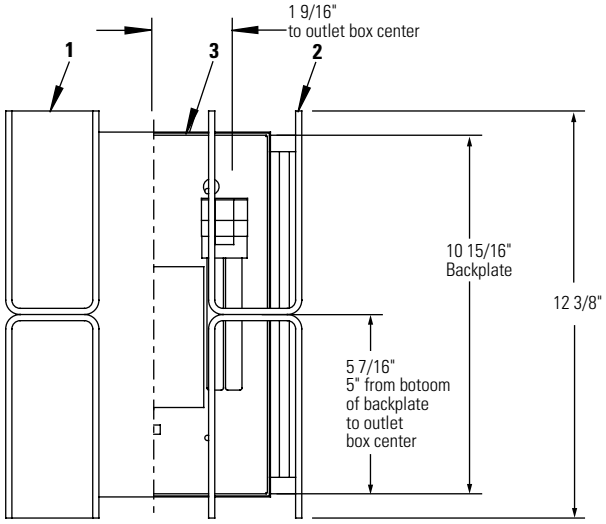

Complete Fixture consists of Lightshield and Backplate Assembly. Order each separately.

Lightshield		Backplate			
Catalog No.	**Description**	**Lamp**	**Catalog No.**	**Ballast**	**Volts**
408885	Pick-Up Sticks	1 X 60W, A-19 Incandescent	**40885**	Not Applicable	120V
408887	Grid	2 X 13W Quad Tube CFL (4-Pin)	**40885U**	Universal Electronic	120/277V
408889	Wood	2 X 13W Quad Tube CFL (2-Pin)	**40885H1**	Magnetic HPF	120V
4088810	Parchment	2 X 13W Quad Tube CFL (2-Pin)	**40885H2**	Magnetic HPF	277V

Features

1. **Lightshield:** Organic composite consisting of fibers, papers or veneers laminated between sheets of light-stable polymer. Washable, virtually tear-proof and puncture-resistant.
2. **Lightshield Frame:** Welded drawn steel wire, 1/8" dia. Nickel powder-coat finish.
3. **Backplate:** Die-formed 20 ga. steel. baked white enamel finish.
4. **Mounting:** Directly to 4" Octagonal Outlet Box.
5. **Lamps:** Incandescent or Compact Fluorescent, by others.

Lamping

Incandescent: 60W A-19, medium base
Compact fluorescent: 13W Quad Tube

	General Electric	Osram/Sylvania	Philips
4-Pin	F13dbx/*/4P	CF13DD/E	PL-C13W/*/A/4P
2-Pin	F13Dbx23T4/*	CF13DD	PL-C13W/*/USA

* Manufacturers' color temperature designation.

Electrical

Lampholders:
Incandescent: Medium base, porcelain, nickel-plate screw shell
Compact fluorescent: 4-pin, G24q-1 base, 2-pin, GX23-2 base

Electrical (continued)

Ballasts:	Electronic Dimmable 120V	Electronic 120/277V	Magnetic 120V	Magnetic 277V
Total Input Watts	24	29	31	26
Max. Line Current (Amps)	0.20	0.24/0.11	.27	.10
Power Factor	.98	.98	High	
Ballast Factor	1.00	1.00	.95	.95
THD	<10%	<10%	N/A	N/A
Min. Starting Temps.	50°F	0°F	32°F	32°F

Labels

UL listed suitable for damp locations.

Job Information Type:

Job Name:

Cat. No.:

Lamp(s):

Notes:

Lightolier a Genlyte company www.lightolier.com
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
© 2005 Genlyte Group LLC • B0805

LIGHTOLIER®

Application Data/Footcandles

Hallway

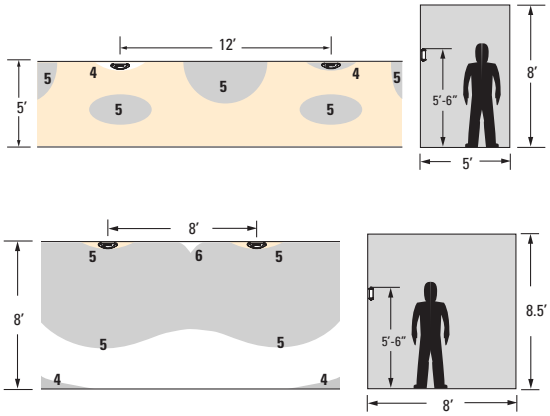

Vestibule / Cocktail Lounge

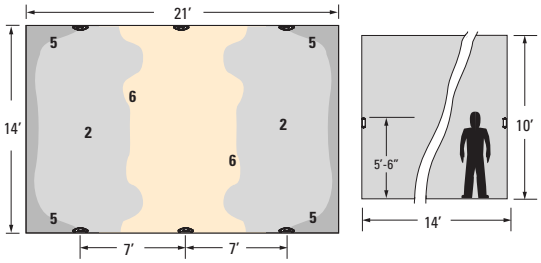

Reflectances

80% ceiling / 50% wall / 20% floor
Footcandles are on floor.

Multiplier Factors

Data shown is based on "Grid" Lightshield #408867 with 2 x 13W Quad lamps.

	CFL	Incandescent
Pick-Up Sticks	0.60	0.30
Parchment	0.45	0.25
Wood	0.45	0.25

Job Information Type:

Lightolier a Genlyte company www.lightolier.com
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
© 2005 Genlyte Group LLC • B0805

LIGHTOLIER®